



# Adsorption dehumidifier DehuTech DT-19000

Dehumidifying Capacity  
at 20°C / 60%RH

**126 kg/h**


Dry Air Flow

**19000 m<sup>3</sup>/h**




**NEW**

- Washable rotor
- No desiccant carry over
- Stainless steel casing
- Direct driven fans
- Silent - low noise level
- Heat recovery on the rotor
- Insulated casing with inspection doors
- New PLC with colour touch display, incl. humidistat
- Service and operation alarms available
- Optional communication via ModBus, Bacnet, Web Server
- Easy installation and maintenance
- Air filters

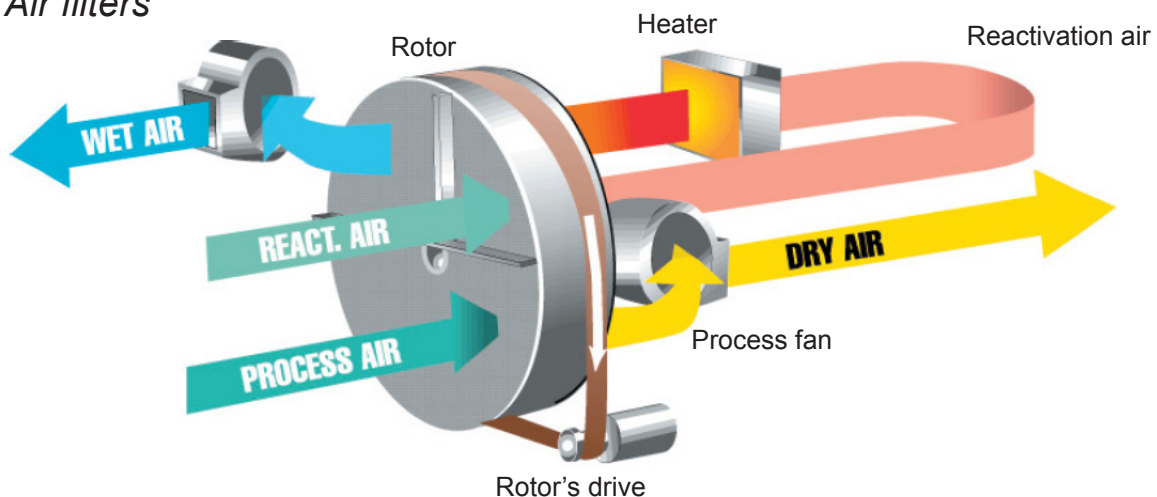

## TECHNICAL DATA

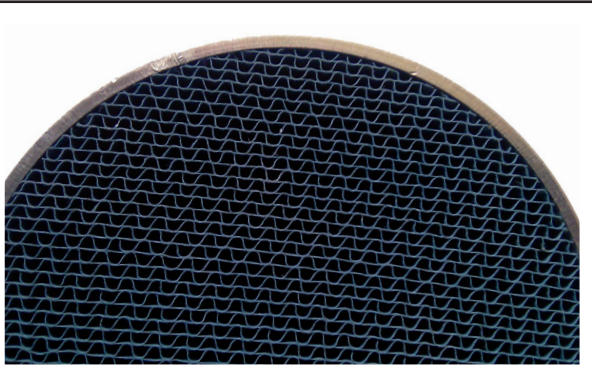

Dehumidifier, type	DT-19000
Nominal capacity *	126 kg/h
Dry air flow**	19000 m <sup>3</sup> /h
Static pressure at outlet	440 Pa
Wet air flow**	6000 m <sup>3</sup> /h
Static pressure at outlet	450 Pa
Heater's power	192 kW
Total power	207,5 kW
Filter class	4
Rotor's reactivation by***	E/G/S
Weight	1700 kg
Noise level	72 dB(A)

\* Valid for 20°C and 60%RH. For other condition the capacity must be recalculated according to diagram - see below.


\*\* Flow related to air density 1.20 kg/m<sup>3</sup>.

\*\*\* E: electric, G: NG, S: steam, W: hot water

## CAPACITY DIAGRAM

**at Inlet:**  
 $x_p = 9,0 \text{ g/kg}$   
 $t_p = +20^\circ\text{C}$

**at Outlet:**  
 $x_r = 3,7 \text{ g/kg}$   
 $t_r = 20 + 17,3^\circ\text{C} = +37,3^\circ\text{C}$

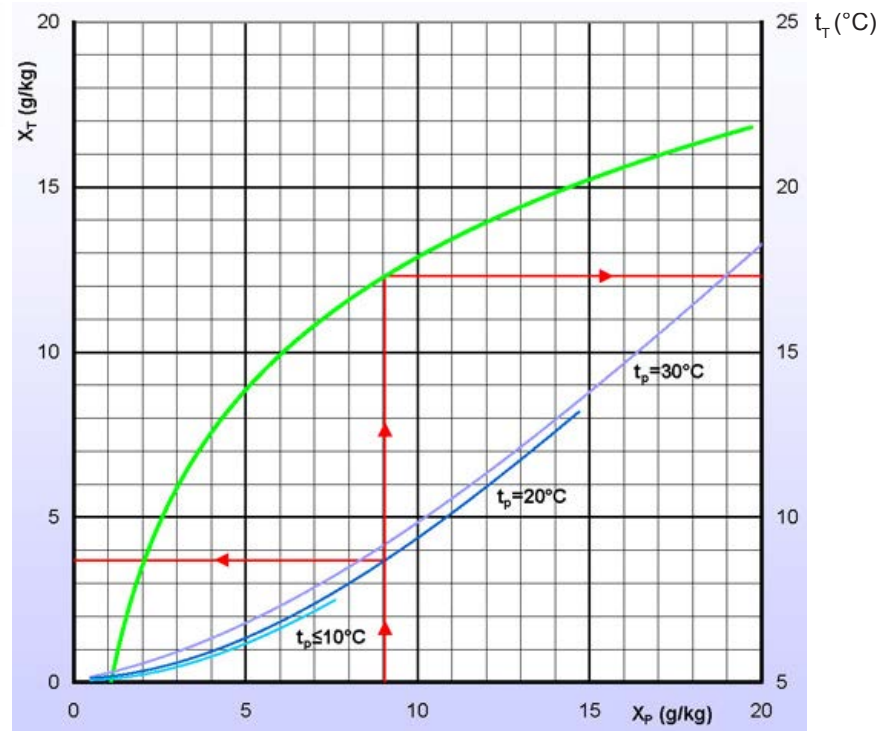

## DIMENSIONS



**FILCO**, spol. s r.o.  
 Dvorská 464/103  
 CZ-503 11 Hradec Králové  
 Tel: +420 495 436 233  
 info@filco.cz  
 www.filco.cz



**DehuTech AB**  
 Enhagsslingan 23,  
 S-187 40 Täby, Sweden  
 Tel.: +46 8792 04 08  
 Fax: +46 8792 55 59  
 info@dehutech.com  
 www.dehutech.com