

# Hyperchill Plus

## Industrial Water Chillers for Precision Cooling



Extremely compact and easy to use, Hyperchill Plus is designed for safe and reliable operation in the most varied working conditions, providing a precise and accurate control of the process fluid temperature. The availability of a wide range of accessories and options makes Hyperchill Plus a very flexible solution that fits the needs of all industrial applications.

Thanks to a non-ferrous hydraulic circuit, Hyperchill Plus ensures stable working conditions with maximum quality and cleanliness of the cooling fluid (water, water-glycol mixture, low viscosity fluids), improving the efficiency and productivity of the process and greatly reducing maintenance costs and plant downtime.

Each individual Hyperchill Plus unit is extensively tested to guarantee efficient operation and reliability in all working conditions.



### Process cooling applications:

- Coating Systems
- Chemical & Pharmaceutical Processes
- Plastics Processing
- Thermoform Machines
- Plasma Coating
- Medical Imaging Systems
- Food & Beverage Industry
- Injection Moulding
- Machine Tools
- Electroplating Baths
- Biogas & Natural Gas Treatment
- Compressed Air Treatment
- Laser Technology
- Extruders
- Surface Processing
- Welding Engineering
- Blow Mould Machines
- Flexographic Printing Systems

# Product Specification

## Hyperchill Plus Water Range

### Customer Benefits

- **A differential pressure switch ensures a system shut down in the case that the circuit runs dry. Therefore the customers investment is protected.**
- **Because of its compact design the Hyperchill Plus provides a space saving and easy to install solution.**
- **Condenser filters reduce dirt, thereby preventing system downtime.**
- **Reliable operation even in extreme ambient conditions. The standard units allow maximum ambient temperatures up to 48 °C. The tropicalized units up to 53 °C.**
- **The non-ferrous hydraulic circuit maintains the quality of the coolant ensuring stable working conditions, improving productivity and decreasing maintenance costs.**

### Product Features

Complete solution, easy to install and manage

- **Non ferrous hydraulic circuit:** non-ferrous water tank (stainless steel from ICEP005), stainless steel plate evaporator, non-ferrous pump with bypass prevent water from becoming corrosive.
- **IP54 standard** from ICEP007 for outdoor installations.
- **Independent condensing plenum** enables routine and special maintenance to be performed without stopping the system.
- **High reliability & Low energy consumption**
- **Large built-in water tank** that provides a large thermal mass / storage capacity thus reducing the number of refrigerant compressor stop/starts and short cycling thereby increasing the compressor and chiller lifetime and reducing the energy consumption.
- **Pump and tank installed inside the chiller** provides a compact and easy to install solution; without pump and/or without tank solution available.
- **Unit structure and design guarantee full internal access** for easy maintenance.
- **Maximum ambient temperature up to 48 °C** on standard units, **Tropicalization up to 53 °C** and Low ambient options ensure reliable operation in extreme ambient conditions.
- **Electronic controllers with proprietary software** provide access to all the parameters of the units and allow special management for any specific need, with remote monitoring available.
- **Models from ICEP020** designed with **fan step control** in order to work in low ambient temperatures down to -10 °C.
- **Oversized condensers and evaporators** guarantee high performing heat exchange increasing COP (Coefficient Of Performance).
- **Completely configurable** with many options and kits to fit the needs of industrial applications.
- **Water and refrigerant manometers** permit full control of the working conditions.
- **PID software developed and tested** to give the highest temperature consistency even at variable loads.
- **Condenser filters** reduce dirt, thereby preventing system downtime.
- **Water pump: (standard 3bar) different head-pressures** available to meet the requirements of specific applications.
- **Use of compliant scroll compressors** (from ICEP007) designed specifically for high efficiency and long life in industrial applications.
- **As standard installed differential pressure switch** that makes sure that the systems shuts down in the case that the circuit runs dry. Therefore the investment is protected.
- **Visual level Indicator:** designed for open circuit versions till model ICEP024
- **Low ambient speed-control** (optional) on fan-motor ensures constant performances at different temperatures, long lifetime of the fans and a reduction in absorbed power when ambient temperature is low.
- **Designed with eyebolts** (till ICEP014) for easy handling.

# Product Specification

## Hyperchill Plus Water Range

### Hyperchill Plus Water Range

Model ICEP		002-W	003-W	005-W	007-W	010-W	014-W	020-W	024-W	030-W	040-W	050-W	060-W
Cooling capacity <sup>1</sup>	kW	1,7	3,3	5,2	7,8	10,8	14,6	20,3	23,6	29,7	40,6	49,0	58,3
Compressor abs. power <sup>1</sup>	kW	0,7	1,3	1,4	1,7	2,5	3,2	4,4	5,4	5,7	7,5	10,0	12,3
Power supply	V/ph/Hz	230/1/50					400/3/50						
Protection index		33					54						
Refrigerant		R407c											

#### Compressor

Type		hermetic pistons						scroll					
Compressors / circuit		1 / 1											
Max.abs. power <sup>1</sup> compressor	kW	0,7	1,3	1,5	2,4	3,8	4,4	5,7	6,6	8,3	11,4	14,9	17,3

#### Axial fans

Quantity	n.°	1	1	1	1	1	1	2	2	2	2	2	2
Max. abs. power <sup>1</sup> fan	kW	0,07	0,12	0,12	0,3	0,3	0,4	0,4	0,4	0,45	0,69	0,69	0,69
Air flow	m <sup>3</sup> /h	430	1295	1295	3437	3437	4337	6878	6159	9437	16029	15215	16875

#### Water cooled version

Condenser water flow	m <sup>3</sup> /h			N.A.			1,5	2,1	2,5	2,9	3,9	5,1	5,9
Condenser connections	in			N.A.			3/4"	3/4"	3/4"	1"	1" 1/4	1" 1/4	1" 1/4

#### Pump P30

Max.abs.power	kW	0,4	0,4	0,4	0,9	0,9	1,0	1,3	1,3	1,3	2,2	2,2	2,2
Water flow (nom. / max) <sup>1</sup>	m <sup>3</sup> /h	0,3/1,9	0,6/1,9	0,9/1,9	1,3/4,8	1,8/4,8	2,5/6	3,4/9,6	4,9/9,6	5,1 / 9,6	6,9 / 18	8,4 / 18	10,1 / 18
Head pressure (nom. / max) <sup>1</sup>	m H <sub>2</sub> O	35/5	33/5	26/5	30/12,8	29/12,8	29/21	29/17,3	28/17,3	26 / 17,3	29 / 23,1	27 / 23,1	25 / 23,1

#### Dimension and weight


Width	mm	520	755	755	756	756	756	756	756	756	856	856	856
Depth	mm	500	535	535	806	806	806	1206	1206	1206	1956	1956	1956
Height	mm	550	801	801	1405	1405	1405	1405	1405	1405	1680	1680	1680
Connections in/out	in	1/2"	3/4"	3/4"	3/4"	3/4"	3/4"	1"	1"	1"	1" 1/2	1" 1/2	1" 1/2
Tank capacity	l	15	15	22,5	65	65	65	100	100	130	250	250	250
Weight (axial)	kg	40	80	85	160	165	175	220	230	250	450	470	510
Weight (water cooled)	kg	n/a	n/a	n/a	n/a	n/a	175	220	230	250	450	470	510

#### Noise level

Sound pressure (axial) <sup>3</sup>	dB(A)	52	52	52	53	53	50	50	50	51	52	52	53
-------------------------------------	-------	----	----	----	----	----	----	----	----	----	----	----	----

1) at water in/out temperature 20/15 °C, glycol 0 %, either 25 °C ambient temperature (air-cooled models) or 25 °C condenser water inlet temperature with 35 °C condensing temperature (water-cooled models)

3) referred to axial fan version in free field conditions at a distance of 10 m from until, measured on condenser side, 1 m from ground

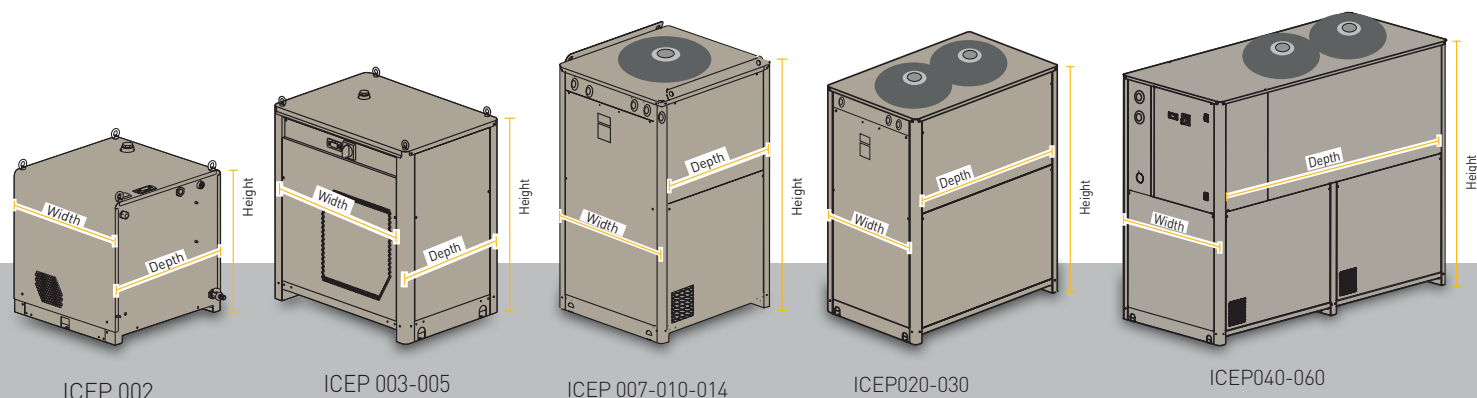

# Product Specification

## Hyperchill Plus Water Range

### Correction factors

<b>A) Ambient temperature</b>	°C	5	10	15	20	25	30	35	40	45
<b>correction factor (f1)</b>		1,05	1,05	1,05	1,05	1	0,94	0,89	0,84	0,80
<b>B) Water outlet temperature</b>	°C	5	10	15	20	25	30	35	40	45
<b>correction factor (f2)</b>		0,76	0,87	1	1,04	1,04	1,04	1,04	1,04	1,04
<b>C) Glycol (by weight)</b>	%	0	10	20	30	40	50	60	70	80
<b>correction factor (f3)</b>		1	0,99	0,98	0,97	0,96	0,95	0,94	0,93	0,92
<b>D) Condenser Water inlet temp.</b>	°C	20	25	30	35	40	45	50	55	60
<b>correction factor (f4)</b>		1,05	1	0,95	0,9	0,85	0,8	0,75	0,7	0,65

To obtain the required cooling capacity, multiply the value at nominal conditions by the above correction factors (i.e. cooling capacity = Pxf1xf2xf3xf4, where P is the cooling capacity at the water outlet temperature of 15 °C). Hyperchill Plus, in its standard configuration, can operate up to ambient temperatures of max. 48 °C and min. 5 °C and water temperatures of max. 30 °C inlet and min. 0 °C outlet. The above correction factors are approximative: for a precise selection, always refer to the software selection programme.

### Options

	ICEP002-W	ICEP003-W	ICEP005-W	ICEP007-W	ICEP010-W	ICEP014-W	ICEP020-W	ICEP024-W	ICEP030-W	ICEP040-W	ICEP050-W	ICEP060-W
No Tank	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
No Tank & NO Pump	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
No Pump	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
P50 (5 bar)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
P15 (1,5 bar)				✓	✓	✓	✓	✓	✓	✓	✓	✓
Dual pump P30 (3 bar)										✓	✓	✓
Harting Plug	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Close Control (+/-0,5 °C)		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Low Water				✓	✓	✓	✓	✓	✓	✓	✓	✓
Fan Speed Control				✓	✓	✓	✓	✓	✓	✓	✓	✓
Low Ambient -20 °C				✓	✓	✓	✓	✓	✓	✓	✓	✓
Anti-Freeze Heating				✓	✓	✓	✓	✓	✓	✓	✓	✓
BioEnergy				✓	✓	✓	✓	✓	✓	✓	✓	✓
Differential Dynamic Set Point				✓	✓	✓	✓	✓	✓	✓	✓	✓
Tropicalization (53 °C, without ambient fill kit)						✓	✓	✓		✓	✓	
Siemens Electrical Components (no control)	on request											

### Versions

Open Circuit	✓	✓	✓	Available with ambient manual fill kit fitted								
Closed Circuit			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Water cooled (plate condenser)						✓	✓	✓	✓	✓	✓	✓

## Accessories

**Water fill kits:** non-ferrous pressurized, automatic or ambient manual kits, for water filling in any installation.

**Remote control kits:** base version for remote ON/OFF and general alarm monitoring. Advanced version for complete remote unit monitoring.

**Wheels (ICEP002 - ICEP014):** for ease of transport.

**Water filters (ICEP002 - ICEP024):** for circuit cleanliness and machinery protection.

**Water by-pass:** non-ferrous, externally adjustable allowing the correct flow through the system to be set.

**Control panel cover:** from ICEP007, can be supplied already installed.

Your authorized Parker distributor in the Czech Republic



**FILCO**, spol. s r.o.  
 Dvorská 464/103  
 CZ-503 11 Hradec Králové  
 tel.: +420 495 436 233  
 info@filco.cz,  
 www.filco.cz